

LEGEND			
	100MM THK FULL HT GYPSUM PARTITION		
	12 MM THK TOUGHENED GLASS PARTITION		
	100MM THK LOW HT GYPSUM PARTITION WITH 100MM X 25MM THK WOODEN PATTI FINISH		
	38MM THK PANELING WITH GYPSUM BOARD		
	150MM THK NEW BRICK WORK		

DOOR LEGEND				DOOR LEGEND			
DOOR TYPE	NOS	DOOR SIZE	DOOR FINISH	DOOR TYPE	NOS	DOOR SIZE	DOOR FINISH
EGD-01	01	Size : 1050mm x 2200mm	FULL GLAZED 12MM THICK TOUGHENED GLASS DOOR	ED-01	01	Size : 825mm x 2050mm	USING EXISTING FLUSH DOOR
EGD-02	01	Size : 1040mm x 2200mm		ED-02	01	Size : 865mm x 2050mm	BOTH SIDE LAMINATE FINISH WITH GRANITE DOOR FRAME
EGD-03	04	Size : 900mm x 2200mm		ED-03	01	Size : 770mm x 1900mm	
FD-01	01	Size : 1000mm x 2200mm	FLUSH DOOR BOTH SIDE LAMINATE FINISH WITH WOODEN FRAME	ED-04	01	Size : 820mm x 1900mm	
				ED-05	01	Size : 790mm x 1900mm	
				FRD-01	01	Size : 900mm x 2100mm	USING EXISTING SINGLE LEAF 2 HR FIRE RATED DOOR WITH PANIC BAR & LOCKING SYSTEM FOR FIRE EXIT

- GENERAL NOTES :**
- All dimensions are in MM.
 - Written dimensions are to be followed. The drawing is not to be scaled.
 - Any discrepancy in the drawing should be brought to the notice of the architects immediately, and prior to commencing any work from this drawing.
 - Any addition or alteration to this drawing should not be made without the written consent of the architects.
 - All work shall be executed in accordance with the best practices to relevant Indian standard codes of practice.
 - Construction from these drawing is subject to all statutory approvals.
 - This drawing must be read in conjunction with other architectural, structural, interior, landscape and utility drawings.
 - Indicated levels are finished.
 - Contractor & engineer shall check & verify all dimensions & M before execution of the work, & bring to the notice of the architect, any discrepancy.



GUJARAT GAS LTD
AHMEDABAD

FIRE
CONSULTANT:

ELECTRICAL
CONSULTANT:

HVAC
CONSULTANT:

CHECKED

APPROVED

APPROVAL-DWG

DATE: SIGNATURE

PURPOSE

R2	SHIFTED ZHC IN GA	15-5-2025
R1	ADD ZONAL HEAD CABIN	15-5-2025
R.NO	DESCRIPTION	DATE

PROJECT :
GUJARAT GAS OFFICE
AT .FIRST FLOOR,GOKULDHAM, OFFICE
SANAND.

TITLE :

CIVIL WORK LAYOUT

PID-AHD-131-24/25

SCALE: N.T.S

DATE: 15-05-2025

NO: INT-04

DRAWN NAVED

CHECKED RAKESH

BY:



N


REV: R2



Sthapati Architecture & Interiors Pvt Ltd.
AHMEDABAD • BANGALORE • DELHI
(www.sthapatigroup.com)
302, Silver Radiance, 1st, Parkview Cross Road, Sindhuvihar Road, Bodakdev,
Ahmedabad-380059. Phone: +91 79 26871665.



Contractors, vendors & consultants must verify all dimension on site and notify this Company any discrepancies prior to carry out works. Written dimensions take precedence over scaled dimensions.
Sthapati Architecture & Interiors Pvt Ltd retains copyright on this drawing.

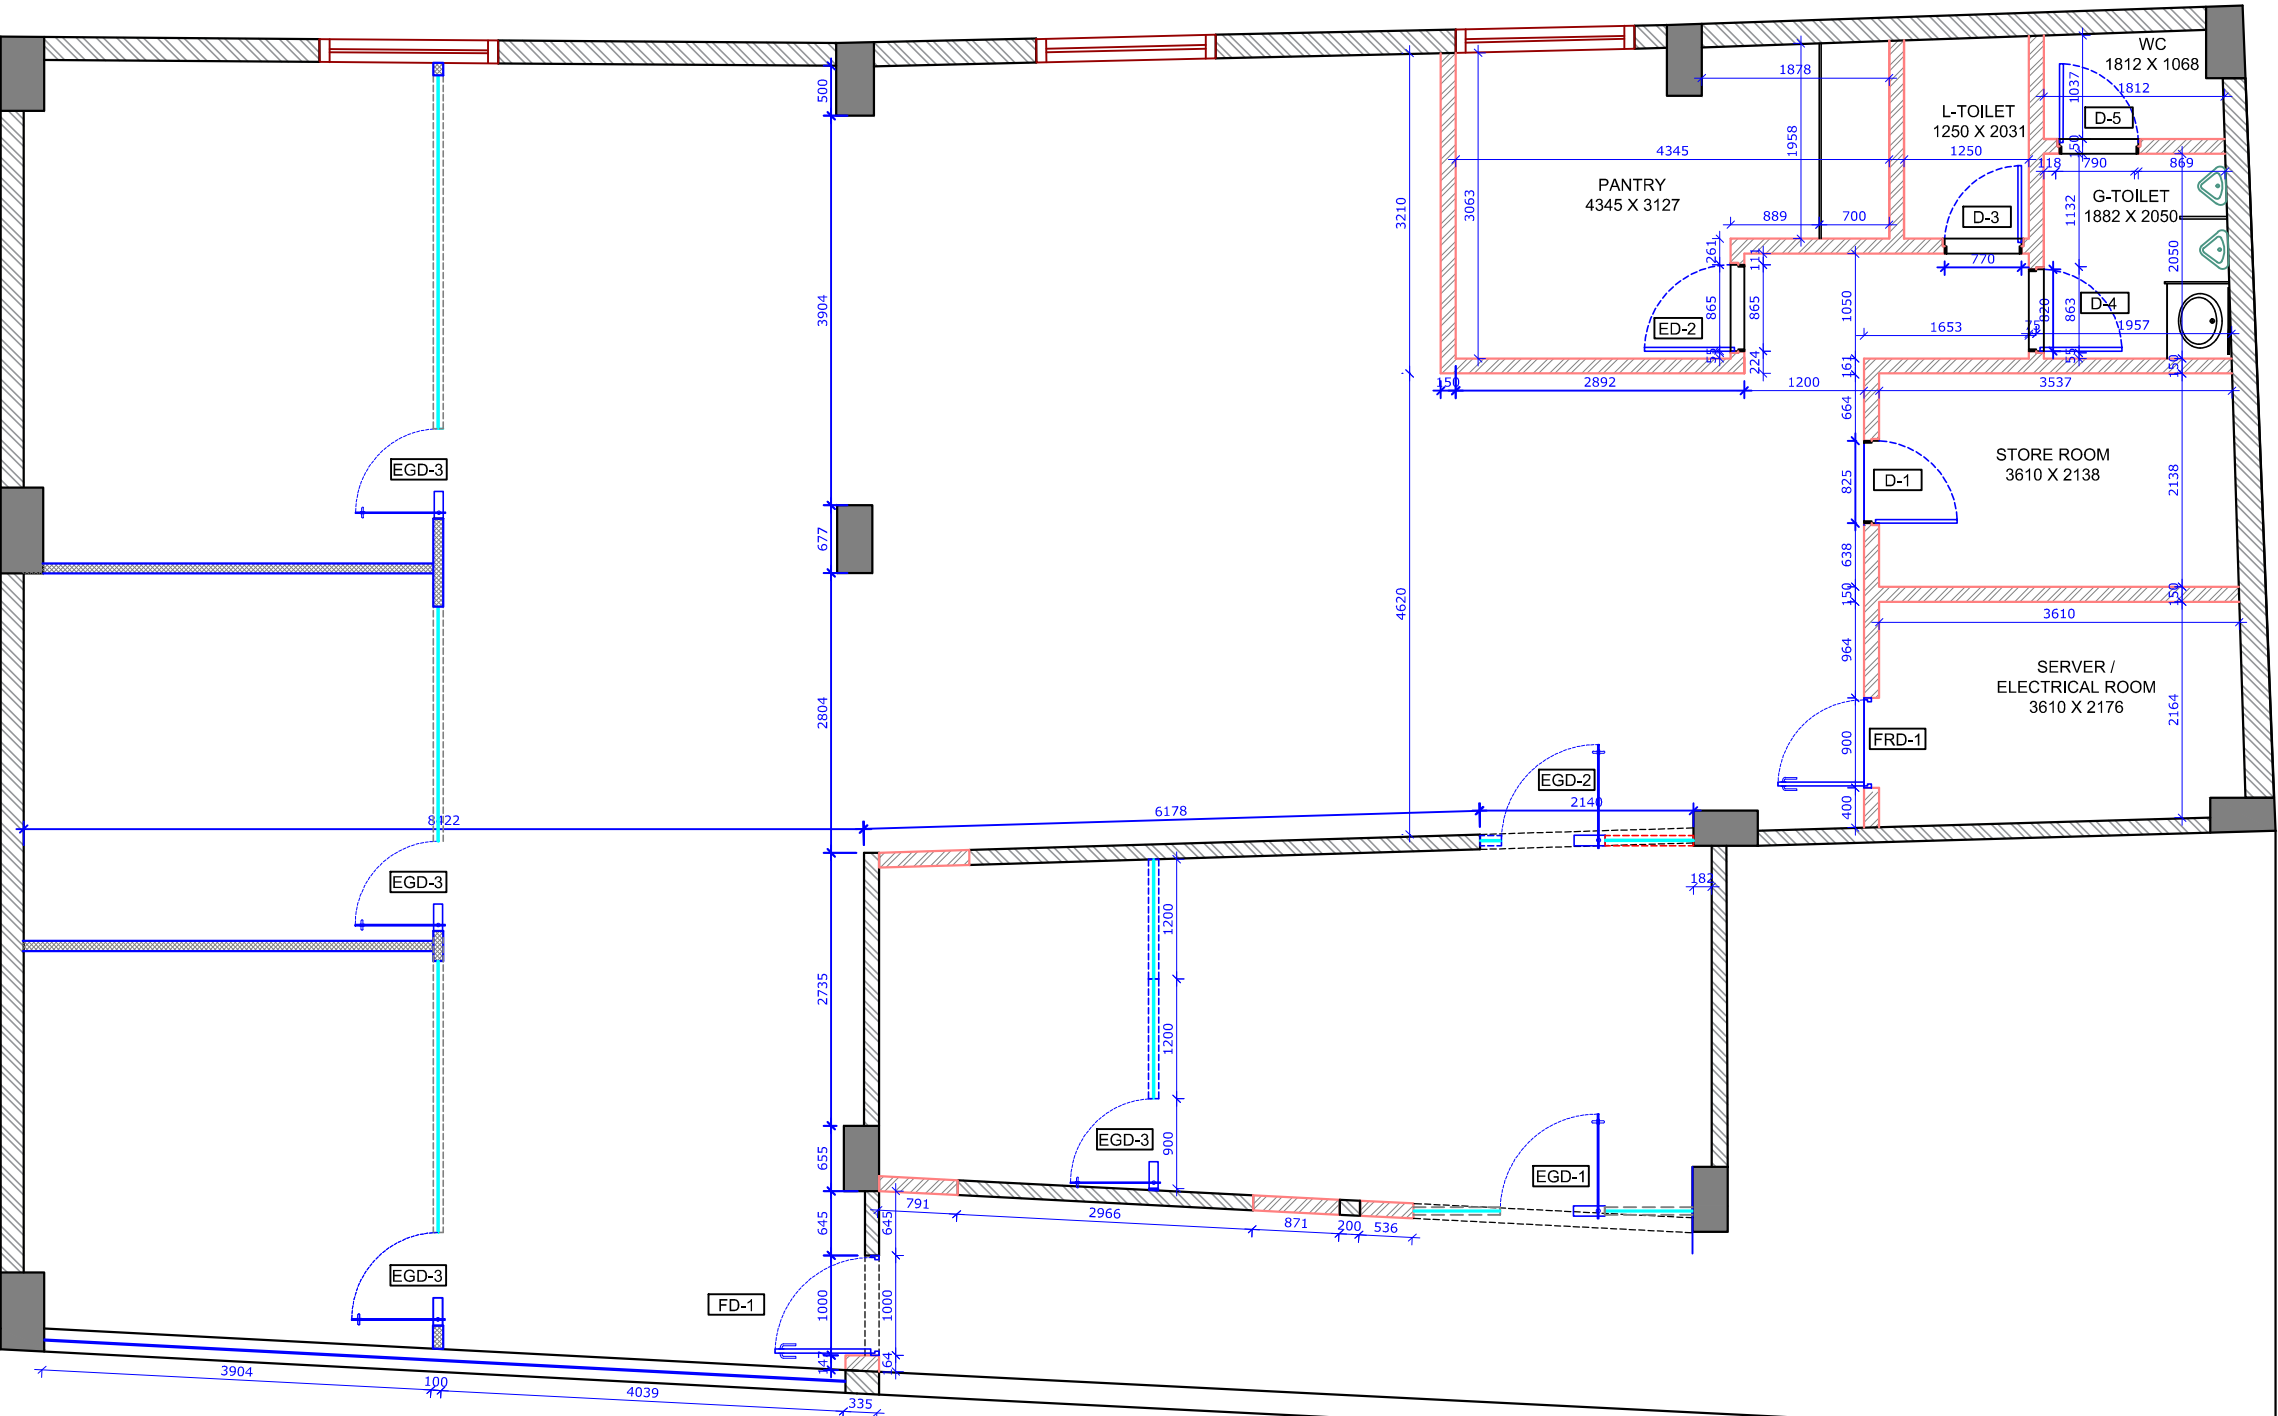

CIVIL LAYOUT